
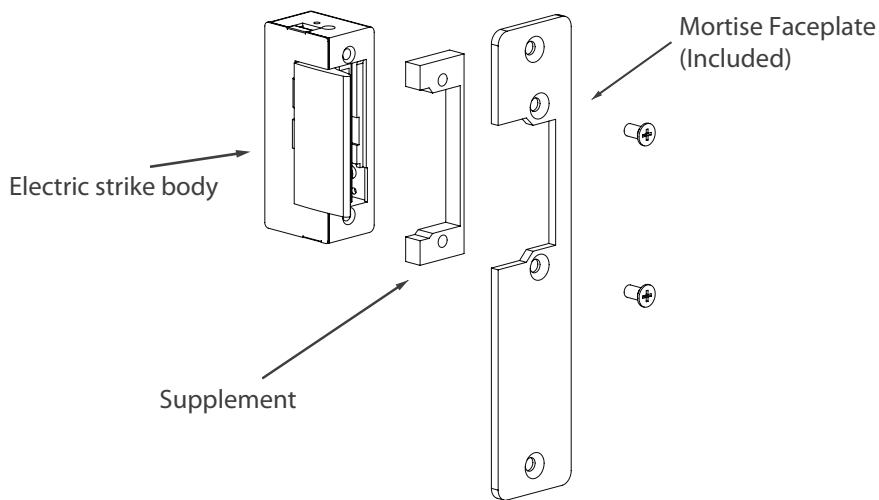



Description:

Ideal for light duty applications with a cylindrical lockset with $1/2"$ to $5/8"$ throw ($5/8"$ requires $1/8"$ door gap), for use in wood, metal or aluminum door frames.

- For use with offset and cylindrical locksets
- Continuous duty operation (DC)
- Fully reversible for right or left hand doors
- 5 years limited warranty




Jamb Door Installation

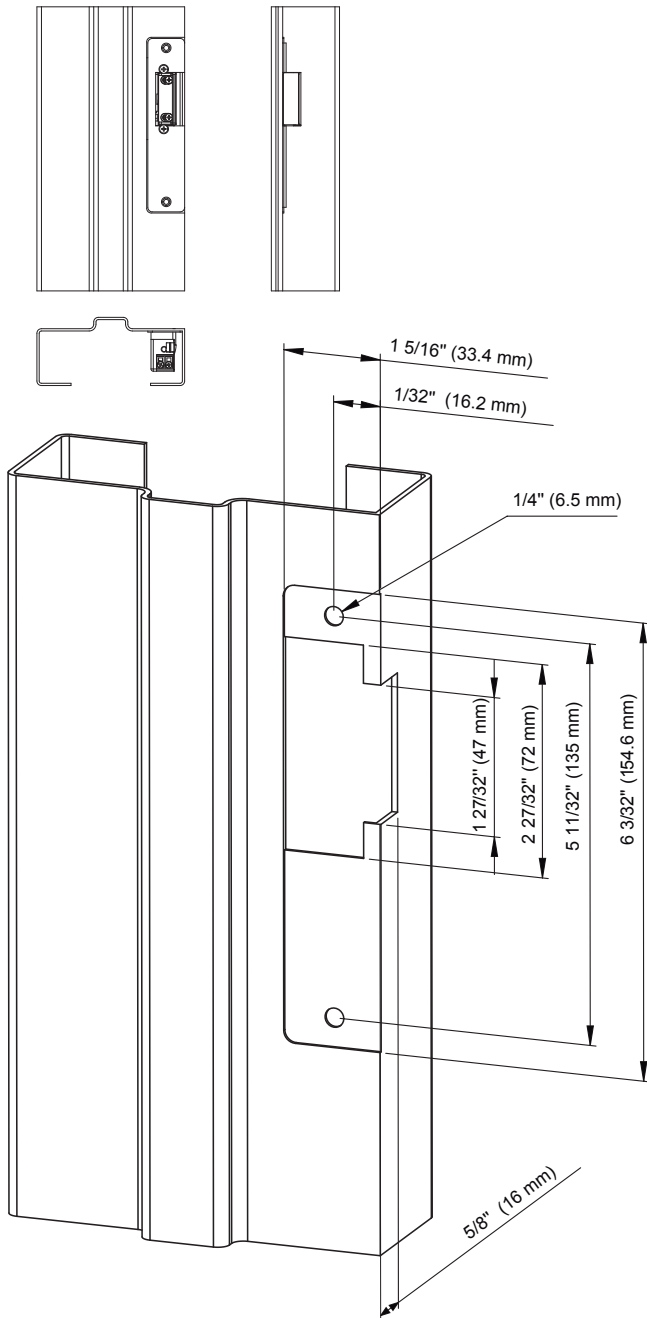

Technical Features		CX-EL0061
Height	2 5/8" (67 mm)	
Width	13/16" (20.5 mm)	
Depth	1 1/2" (37.4 mm)	
Suits Latches With Maximum Throw Of	1/2" (13.6 mm)	
Endurance Cycle Test	200,000	
Holding Force	520 Lbs. (236 Kg.)	
Operating Temperature Range	5° to 104°F (-15° to 40°C)	
		8-16V
Rated Resistance	17 ohms	
AC Current Consumption	8V	370 mA
	16V	750 mA
Stabilized DC Current Consumption	8V	470 mA
	12V	940 mA
Max. Latch Preloaded AC	30 Lbs. (14 Kg.)	

Connect the wires directly to the terminals.
This device is not polarity sensitive.

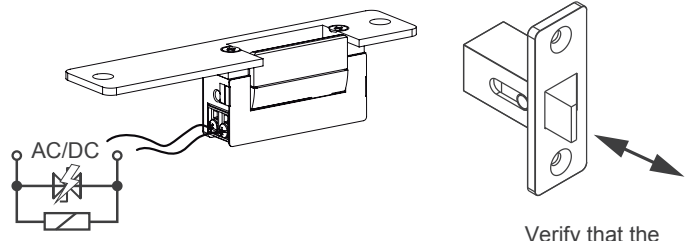

Verify the voltage provided matches the electric strike. Many power supplies operate at higher levels than the rated capacity of the strike. Higher voltage levels than listed may damage the strike and void the warranty.

Verify that the latch works smoothly when installing

Questions?

Call us toll-free at 1-877-226-3369



Push Buttons



Key Pads



Strikes



Magnetic Locks



Key Switches



Relays & Timers



Access Control